


219.00 EUR
 incl. 19% VAT, plus [shipping](#)

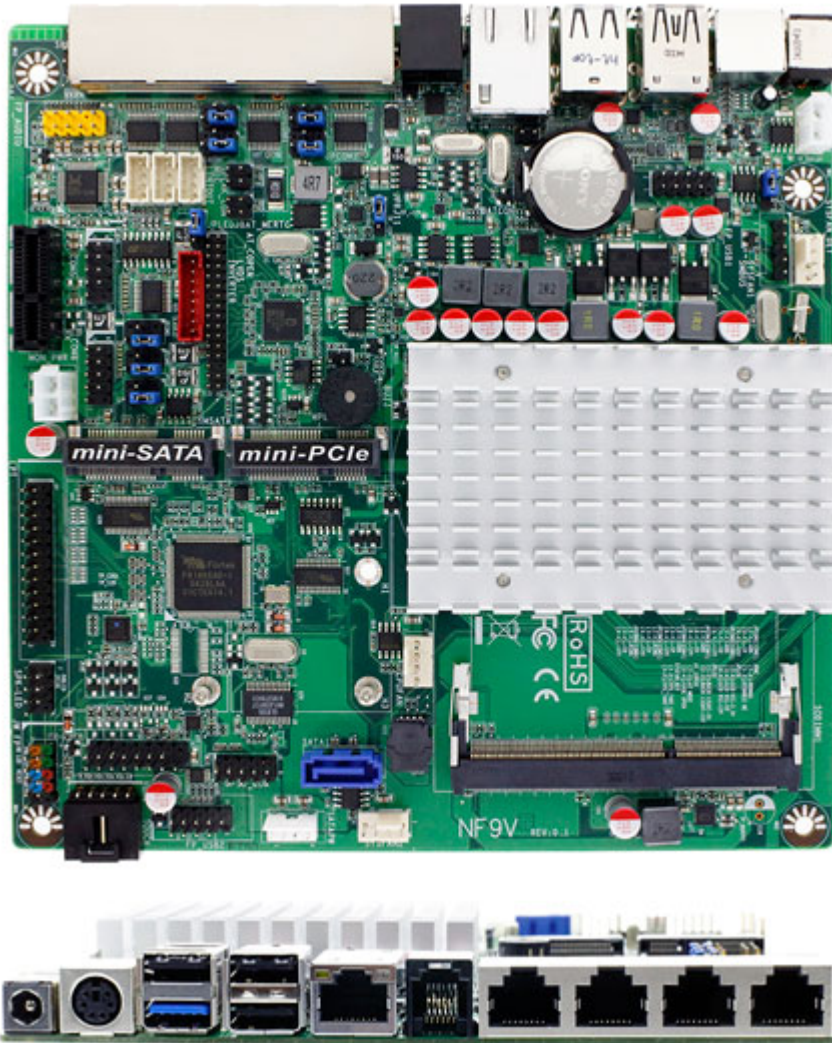

- Intel® Baytrail-M N2930
- 1 * DDR3L 1333 up to 8GB
- 1 * Serial ATAII (3Gb/s) Devices
- I2C support
- Touch panel I/F support
- 4 * RJ45 for Series(Console) port, 1 * RJ11
- 1 * Realtek Gigabit LAN, 1 * PS2
- PCIe x1 * 1, mPCIe * 1, mSATA * 1
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan
- Support DC Fan
- Mini-ITX form factor (170mm x 170mm)

Form Factor	
Dimensions	Thin Mini-ITX (6.7-in x 6.7-in, 170 x 170mm)
Processor System	
CPU	Intel® Baytrail-M/D/I Processor Supports Hyper-Threading Technology
Core Number	(By CPU)
Max Speed	(By CPU)
L2 Cache	(By CPU)

Chipset	- N/A
BIOS	- AMI 64Mb Flash ROM
Expansion Slot	
PCI	- 0
Mini-PCIe	- 1
mSATA	- 1
PCIe	- 1 (x1)
CFast Card Socket	- 0
CF Card Socket	- 0
Memory	
Technology	- Dual/Single Channel DDR3 1333/1066 MHz SDRAM (By CPU)
Max.	- 8GB
Socket	- 1 x SO-DIMM
Graphics	
Controller	- Intel® Gen7 Intel® Graphics DX 11, OGL3.2
VRAM	- Shared Memory
VGA	- 1 (Internal)
LVDS	- Dual Channel 24-bit, max resolution 1920x1200@60Hz
HDMI	- No
DVI-I	- No
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: Realtek RTL8111G
Connector	- 1 x RJ 45
SATA	
Max Data Transfer Rate	- 1 x SATAII (3.0Gb/s)
Real I/O	
VGA	- 0
DVI-I	- 0
HDMI	- 0
DisplayPort	- 0
Ethernet	- 1
USB	- 4 (1 x USB 3.0, 3 x USB 2.0)
Audio	- 0
Serial	- 4 (4 x RJ45)
RJ11	- 1
eSATA	- 0
PS2	- 1
DC-input	- 1 (DC-in JACK 12V)
Internal Connector	
USB	- 4 (4 x USB 2.0 via 10pin header)
PS2	- 0
LVDS / inverter	- 1/1
VGA	- 1
Serial	- 2 (2 x RS-232 with 5V/12V selectable header, 1 x support RS232/422/485)
SATA	- 1 x SATAII (3.0Gb/s)
mPCIe	- 1
Parallel	- 1
mSATA	- 1
CIR	- 0
GPIO 8-bit	- 4in / 4 out
Chassis intrusion	- 1 (via 12pin header)

Audio Header	- 1 x FP_AUDIO ,1 x 2ch Line Out ,1 x MIC ,1 x 2ch audio w/3W Amp
SMBUS(I2C)	- 1
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- 12V DC-In JACK
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0■– 60■ - Storage: -20■– 85■