




129.00 EUR
incl. 19% VAT, plus [shipping](#)

- NVIDIA Chipset !
- GeForce 8200 GFX !

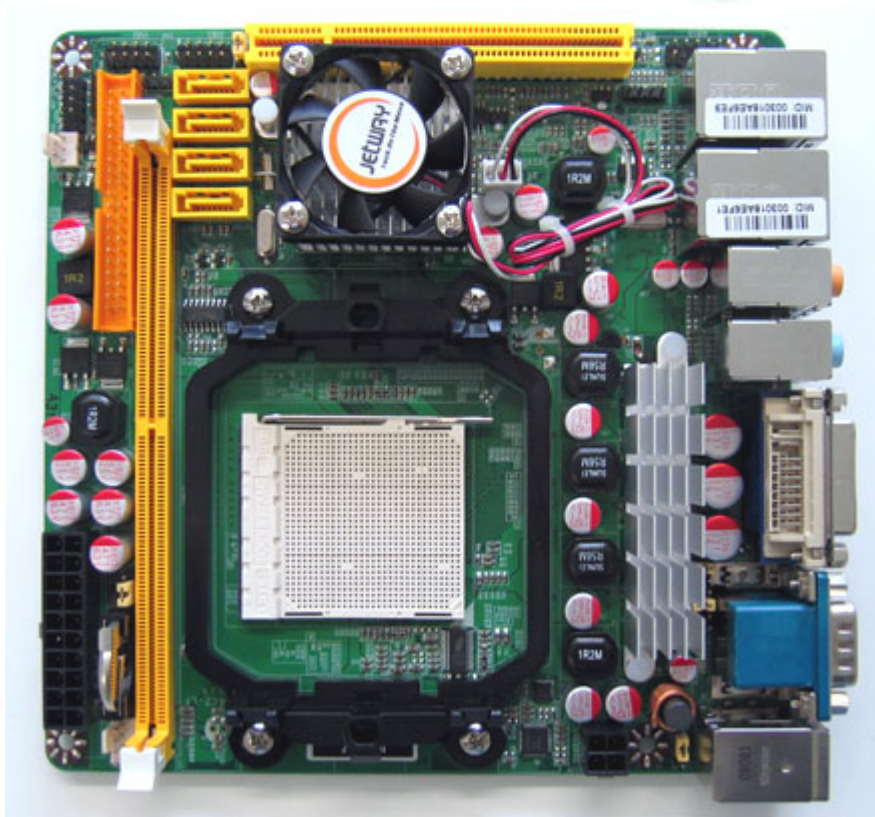

Support:  [Power Consumption](#)

- JNC62K (alias J6C2)
- NVIDIA NF-8200 (MCP78S) Chipset
- Support AMD socket AM2/AM2+ Quad Core Opteron™ & Phenom™
- Integrated GeForce 8200 GFX Core Processor
- Support HTT 3000Mhz
- Support 4 SATAII devices with RAID0, 1, 0+1, 5, JBOD
- Dual Gigabit LAN support, PXE support
- Support Blu-Ray and HD-DVD, H.264, VC1 and MPEG2
- Audio over DVI port
- 17 x 17CM Mini-ITX Form Factor

| | |
|----------------------|--|
| Form Factor | Mini-ITX 170 mm x 170 mm |
| CPU | Socket AMD AM2 HTT 3000MHz AMD Opteron™ & Phenom™ With HyperTransport Technology |
| Memory | 1 * 240-pin DIMM socket for unbuffered Dual DDR2 800 SDRAM up to 2GB |
| Chipset | NVIDIA NF-8200 (MCP78S) Single Chipset |
| PCI enhanced IDE | 2 * Ultra DMA 133/100 / 66 IDE Devices Support |
| Serial ATA Interface | 4 * Serial ATA2 Devices with RAID 0, 1, 0+1, 5, and JBOD - Integrated NVIDIA GeForce Series DirectX 10 Graphics Processor - Integrated 300MHz DAC for external Desktop Displays |
| VGA Interface | - Full HD-DVD and BluRay Video Decode - Full bitrate H.264, VC1 and MPEG2 Video Decode - Full nView® Multi-Display technology capability, with Two independent display controllers. |
| Video Memory | Share Memory up to 512MB |
| Audio Interface | ALC883 6-Channel Audio CODEC (TBD) |
| LAN Interface | Realtek RTL8211B PHY Gigabit Ethernet LAN Realtek RTL8111C PCI-E Gigabit Ethernet LAN |
| Extended Interface | 1 * 32-bit PCI Slot 2 * High Speed USB Connectors @ 480 Mbit / s for 4 USB 2.0 Ports |
| Internal I/O Port | 1 * CPU Smart Fan, 2 * DC Fan Connectors 1 * CD / AUX Audio in & SPEAK Out 1 * SPDIF |
| BIOS | Award 8 MB Flash ROM 6 * High Speed USB Connectors @ 480 Mbit / s 1 * DVI-I Port (with Audio) 1 * D-Sub 15-pin VGA Connector |
| External I/O Port | 2 * RJ45 Connectors 2 * Audio I / O 1* PS/2 Mouse & Keyboard 2 * RS232 Port (COM Port) |
| Power Requirement | 1 * 12V 4-Pin ATX Power Connector 1 * 20Pin ATX Power Connector |
| Dimension | 170mm x 170mm |